

Commander 420



- + Stainless steel Commander with door for industrial applications
- + High material quality
- + Handle set optional

Included in delivery

Enclosure with door, rect angle, silicone seal - depending on Execution with closed or individual manufactured front, internal fixing and coupling hole for suspension system GTH 48

Technical data


Material	Stainless steel 1.4301/304 other materials on request
Surface	grinded, grain 240
Seal	Silicone
Ingress protection	IP65 to EN 60529
Temperature range	-40 °C to +80 °C



Commander 420

Product range

Order No.	Dimensions (mm) W x H x D	Fitting width	Fitting height	Drillings for suspension system (Side A)	Weight (g)
56.20 01 01	380 x 250 x 150	338	240	GTH 48	9000
56.20 01 02	380 x 250 x 220	338	240	GTH 48	9000
56.20 01 03	500 x 350 x 150	458	340	GTH 48	11000
56.20 01 04	500 x 350 x 220	458	340	GTH 48	11500
56.20 01 05	500 x 450 x 150	458	440	GTH 48	12000
56.20 01 06	500 x 450 x 220	458	440	GTH 48	12500

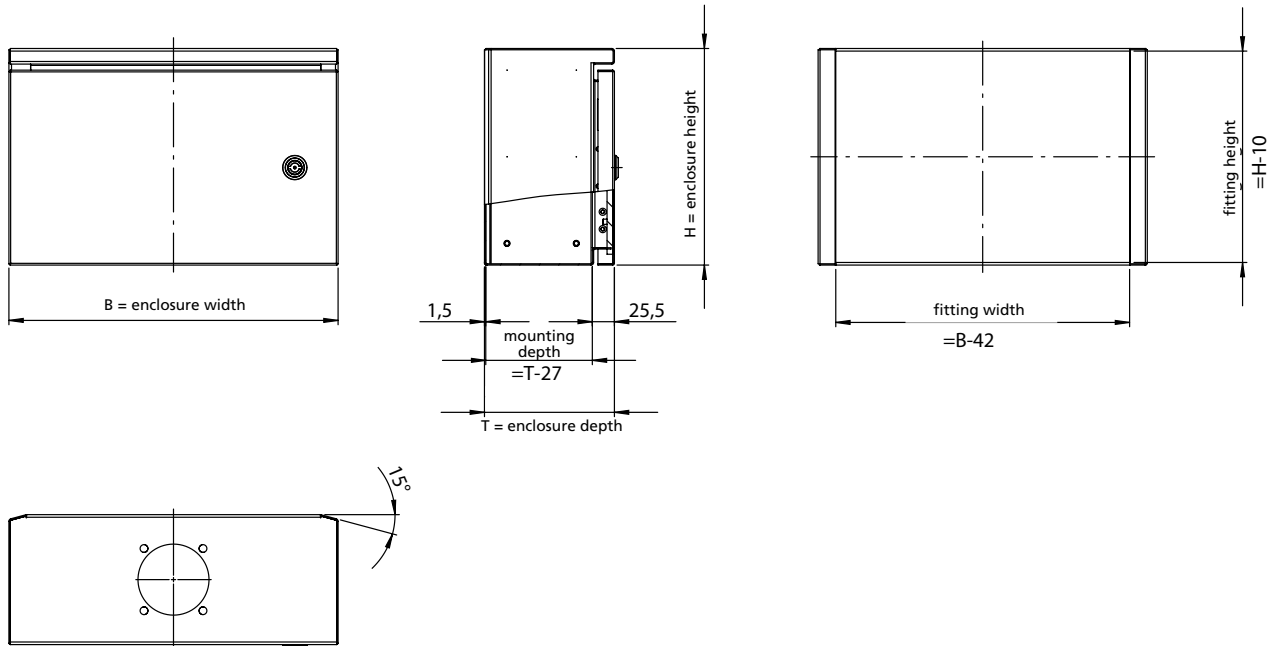

Accessories

Mounting bracket set

Order No.	Execution
56.20 99 01	for internal fitting of components

Handle set

Order No.	Execution
56.20 01 93	Handle set ECO for Commander 420, L = 220 mm
56.20 01 94	Handle set ECO for Commander 420, L = 320 mm
56.20 01 95	Handle set ECO for Commander 420, L = 420 mm

